


980nm and 808nm 15W Multi-Function Detachable Diode Laser KA15D15AMCC

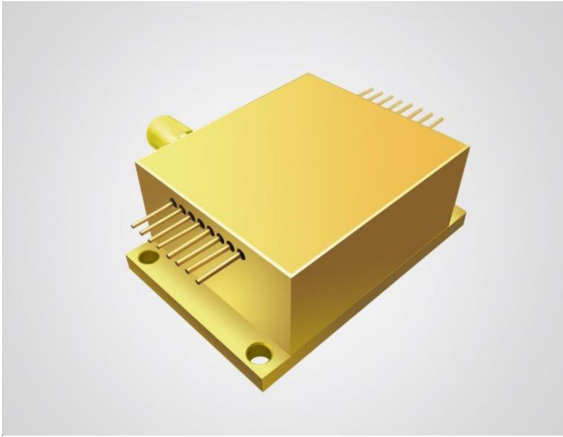

Features:

- ◆ 15W output power
- ◆ 808nm and 980nm wavelength integration
- ◆ Standard fiber coupling for 400 μ m/0.22NA
- ◆ Customer options:
 - Aiming beam
 - Power PD
 - Thermistor
 - Fiber detector

Applications:

- ◆ Medical use
- ◆ Material processing

BWT Beijing's high power diode laser modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

980nm and 808nm 15W Multi-Function Detachable Diode Laser
KA15D15AMCC

| Specifications(25°C) | | Symbol | Unit | KA15D15AMCC | | |
|--------------------------|-----------------------------------|-------------------|-------------------------------|-------------|------------------|---------|
| | | | | Minimum | Typical | Maximum |
| Parameter ⁽¹⁾ | Center wavelength | λ_c | nm | 970 | - | 990 |
| | CW Output Power | P _o | W | 15 | - | - |
| | Threshold current | I _{th} | A | - | 1 | - |
| | Operating current | I _{op} | A | - | - | 11 |
| | Operating voltage | V _{op} | V | - | - | 4 |
| | Reverse Voltage | V _{re} | V | - | 5 | - |
| | Slope Efficiency | η | W/A | - | 1.8 | - |
| | Electrical-to-Optical Efficiency | PE | % | 40 | - | - |
| | Spectral width(FWHM) | $\delta\lambda$ | nm | - | 6 | - |
| | Center wavelength | λ_c | nm | 798 | - | 818 |
| | CW Output Power | P _o | W | 15 | - | - |
| | Threshold current | I _{th} | A | - | 1.8 | - |
| | Operating current | I _{op} | A | - | - | 10 |
| | Operating voltage | V _{op} | V | - | - | 4.5 |
| | Reverse Voltage | V _{re} | V | - | 5 | - |
| | Slope Efficiency | η | W/A | - | 1.6 | - |
| | Electrical-to-Optical Efficiency | PE | % | 40 | - | - |
| | Spectral width(FWHM) | $\delta\lambda$ | nm | - | 6 | - |
| | Wavelength Shift with Temperature | - | nm/°C | - | 0.3 | - |
| Fiber Data | Buffer diameter | D _{buf} | μm | - | 730 | - |
| | Cladding diameter | D _{clad} | μm | - | 440 | - |
| | Core diameter | D _{core} | μm | - | 400 | - |
| | Numeric aperture | NA | - | - | 0.22 | - |
| Others | ESD | V _{esd} | V | - | - | 500 |
| | Storage temperature | T _{stg} | °C | -20 | - | 70 |
| | Lead Soldering Temp | T _{is} | °C | - | - | 260 |
| | Lead Soldering Time | t | sec | - | - | 10 |
| | Operating case temperature | T _{op} | °C | 15 | - | 35 |
| | Relative Humidity | RH | % | 15 | - | 75 |
| PD Data | Current | I _{mo} | μA | 200 | - | 2000 |
| Thermistor | - | R _t | (K Ω)/ β (25°C) | - | 10 \pm 3%/3477 | - |
| Aiming Beam Data | Output Power | P _a | mW | - | 2 | - |
| | Wavelength | I _a | nm | 630 | - | 643 |
| | Voltage ⁽²⁾ | V _a | V | - | 2.2 | - |

980nm and 808nm 15W Multi-Function Detachable Diode Laser KA15D15AMCC

| | | | | | | |
|--|---------|-------|----|---|----|----|
| | Current | I_a | mA | - | 45 | 65 |
|--|---------|-------|----|---|----|----|

- (1) Data measured under operation output at 15W.
 (2) Support 5V DC input

Package Dimensions (mm)

| 引脚 | 功能 | 引脚 | 功能 |
|----|--|-----|--------------|
| 1 | Fiber detector LED(-) | 9 | 980nm LD (+) |
| 2 | Fiber detector LED(+)* *Fiber detector PD(N)* | 10 | 980nm LD (-) |
| 3 | Fiber detector PD(P)* | 11 | 808nm LD(+) |
| 4 | Aiming beam (+5V)* PD (N) | 12 | 808nm LD(-) |
| 5 | Aiming beam (0V)* | 13 | None |
| 6 | PD(P) | 14 | None |
| 7 | Thermistor* | 15 | None |
| 8 | Thermistor* | 16- | None |

*: Optional functions.

OPERATING NOTES

- ◆ Avoid eye exposure to direct or scattered radiation.
- ◆ ESD precautions must be taken.
- ◆ Please connect pins to wires by solder instead of using socket when operation current is higher than 6A.
- ◆ Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- ◆ Use constant current power supply. Avoid surge current.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ A minimum bend radius should be 300 times greater than the fiber cladding diameter, dynamic bend radius should be 400 times greater than the fiber cladding diameter.
- ◆ Operation temperature is 15°C~ 35°C.
- ◆ Storage: -20°C~ +70°C, all pins short-circuit.



Declaration: information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.